


### *New hassle-free smart control panel for your home*

The akubela HyPanel 0-10V FANCOIL version, a smart fancoil thermostat control panel with an Android 10 operating system. The ALL IN ONE design integrates smart intercom, ZigBee gateway, Thermostat, and home automation, and it is compatible with plentiful ecosystem. Multi-modal interaction can be easily used by the whole family, offering the excellent smart home experience.

#### *At a Glance*

- Excellent performance with Android 10 system
- 4" multi-touch screen with energy saving mode
- Support 0-10V fancoil thermostat control
- Smart intercom, ZigBee gateway, home automation ALL IN ONE
- Kinds of sensors built-in
- EU standard flush mounted box

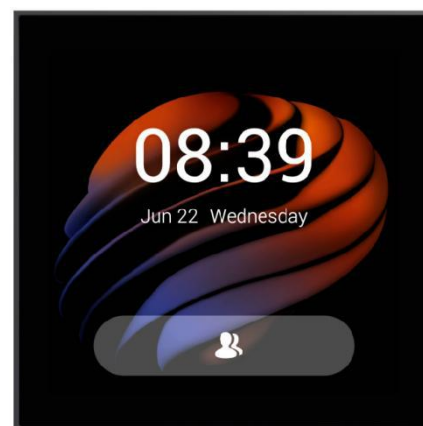

### Basic Information

- Model Number: PS51-10VFANCOIL-EU
- Power Supply: 24VAC/DC
- Built-in Relay Capacity of Fan: 5A
- Fan Output: 3 relays with resistive load up to 5A, with inductive load up to 3A each for fan speed
  - Wire Range: 0.5 ~ 1.5mm<sup>2</sup> (22 ~ 14AWG)
- Valve Output: 2 way 0-10V load
- Operation System: Android 10
- RAM/ROM: 1GB/8GB
- Wi-Fi: IEEE802.11 b/g/n, @2.4GHz/5GHz
- Bluetooth: Bluetooth 4.2
- ZigBee: ZigBee 3.0
- ZigBee Sub-Device Limit: 128
- RS485: Supported
- NTC Measurement Range: -30°C ~ 80°C
  - Accuracy: ±0.5°C
- Microphone: Dual microphones, -42dBV
- Speaker: Single speaker, 8Ω/1.5W

### Appearance

- Material: V0 fireproof PC
- Screen: 4" multi-touch screen
- Screen Resolution: 480×480 pixels
- Screen Brightness: 210 cd/m<sup>2</sup>



## Sensors Built In

- Proximity Sensor: 30 ~ 60cm
- Light Sensor: Low-level lux detection
- Temperature Sensor:  $\pm 1^{\circ}\text{C}$ , range:  $-10^{\circ}\text{C} \sim 55^{\circ}\text{C}$
- Humidity Sensor:  $\pm 5\%$ , range: 10% ~ 90%RH, without condensation

## Working Environment

- Environment: For indoor use only

- Working Humidity: 10% ~ 90%RH, without condensation
- Working Temperature:  $-10^{\circ}\text{C} \sim 55^{\circ}\text{C}$
- Storage Temperature:  $-20^{\circ}\text{C} \sim 65^{\circ}\text{C}$
- IP Rating: IP20

## Installation

- Installation: Wall flush mounting
- Flush Mounted Module: EU/UK standard
- Wiring Way: L- + N- wire required

## Product Dimension Diagram (mm)

